


Feed through for optics fibres

FT3 - Standard model for 3 pairs of fibres

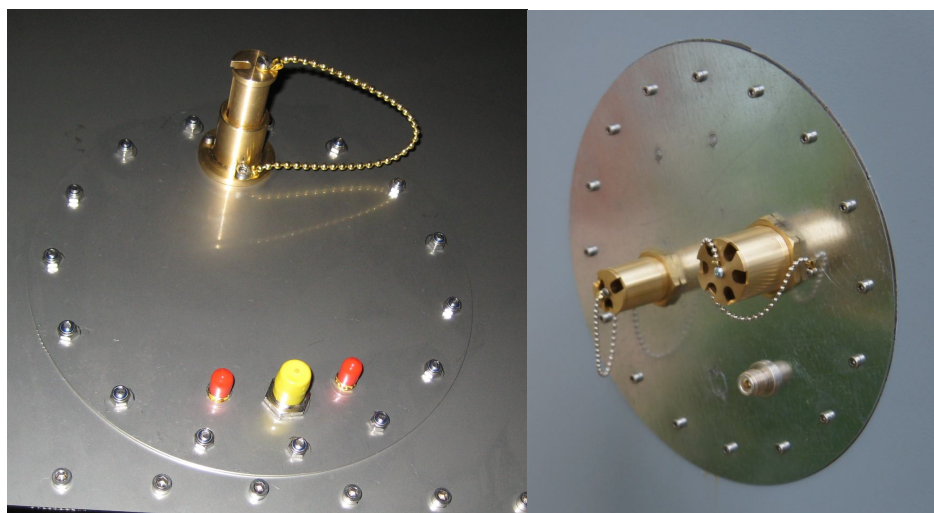

Technical Specifications		FT3
No. of fiber optic		3 couples
Cut-Off Frequency		18GHz
Mounting hole Diam.		22 mm.
Thickness of the panel		Up to 6mm.

* For installing it, a 22mm. hole is necessary to be prepared in the shielding.
The part which will receive the fibres have to be fixed with a nut screws
The cylinder part will be secured by a small chain to the flange.

Other models on demands.



**EMCTEST Tecnologia Eletronica e
Telecomunicações Ltda**

Rua Aragonita, 2320 – P.O.Box 149,
BOMBINHAS (SC) - CEP 88215-000 BRAZIL
Tel. +55 47 33933377 Cell. +55 47 99389063
Fax. +39 0541 1641013
Mail: emctest@emctest.com.br

w w w . e m c t e s t . c o m . b r