


## Feed through for optics fibres

### FT3-18GHz Standard model for 3 pairs of fibres



3 couples fiber optics feedthrough for 18GHz cut-off frequency

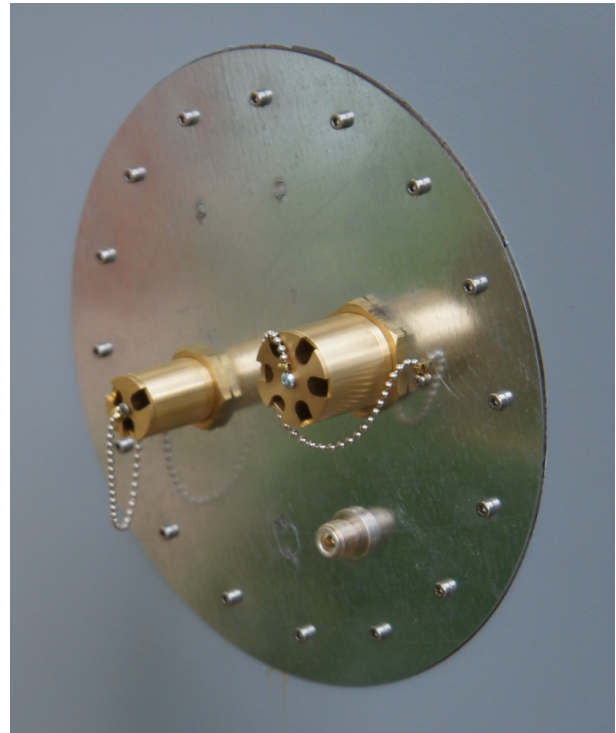

3 and 6 couples fiber optics feedthrough for 9GHz cut-off frequency

Technical Specifications		FT3
No. of fiber optic		3 couples
Cut-Off Frequency		18GHz
Mounting hole Diam.		22 mm.
Thickness of the panel		Up to 6mm.

\* For installing it, a 22mm. hole is necessary to be prepared in the shielding. The part which will receive the fibres have to be fixed with a nut screws The cylinder part will be secured by a small chain to the flange.